


UNIPUR®-CP flexible at low temperature, with customer markings, halogen-free, wear resistant, robust, screened, EMC-preferred type, meter marking

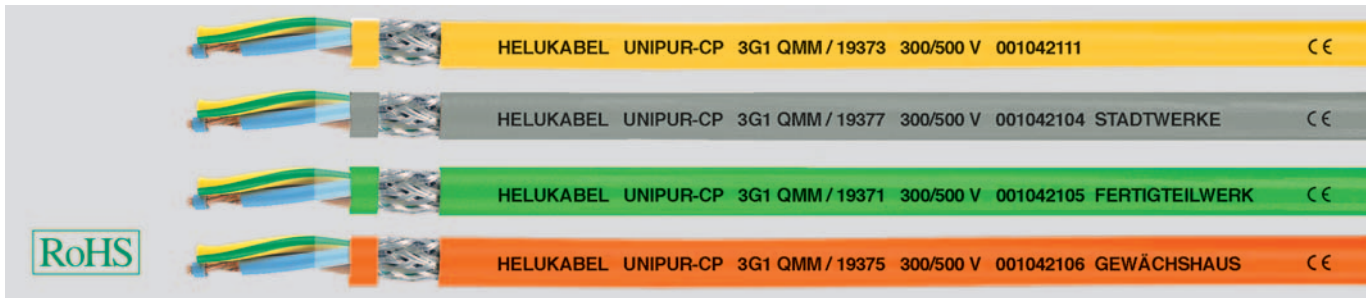

Technical data

- Special TPE/PUR screened connecting cable adapted to DIN VDE 0285-525-2-21 / DIN EN 50525-2-21
- **Temperature range**
flexing -40°C to +90°C
- **Nominal voltage**
up to 1 mm² U₀/U 300/500 V
from 1,5 mm² U₀/U 450/750 V
- **Test voltage** 3000 V
- **Coupling resistance**
max. 250 Ohm/km
- **Minimum bending radius**
flexing 12,5x cable Ø
fixed installation 7,5x cable Ø
- **Radiation resistance**
up to 100x10⁶ cJ/kg (up to 100 Mrad)

Cable structure

- Bare copper-conductor, to DIN VDE 0295 cl.5, fine-wire, BS 6360 cl.5, IEC 60228 cl.5
- Core insulation of thermoplastic elastomere (TPE)
- Core identification to DIN VDE 0293-308
- up to 5 cores coloured
- from 6 cores, black with continuous white numbering
- GN-YE conductor, 3 cores and above in the outer layer
- Cores stranded in layers with optimal lay-length
- Separating foil
- Tinned copper braided screen, approx. 85% coverage
- Outer sheath of PUR compound type TMPU adapted to DIN EN 50363-10-2
- Sheath colour by request
- with meter marking

Properties

- Resistant to
- Oils and fats
- Water and weathering effects
- Ozone and oxygen
- UV-radiation
- Hydrolysis
- Microbial attack
- Abrasion resistant
- Notch resistant
- Resistant to tearing and cutting
- Good flexibility at low temperatures down to -40°C
- The materials used in manufacture are cadmium-free and contain no silicone and free from substances harmful to the wetting properties of lacquers

Note

- G = with green-yellow conductor
x = without green-yellow conductor (OB).
- Please complete the part number for these cables by adding the suffix for the colour required as per the list:
0 = approx.RAL 5015, blue
1 = approx.RAL 6018, green
2 = approx.RAL 8003, brown
3 = approx.RAL 1021, yellow
4 = approx.RAL 3000, red
5 = approx.RAL 2003, orange
6 = approx.RAL 4005, violet
7 = approx.RAL 7001/7032, grey
Further colours on request.
- unscreened analogue type:
UNIPUR®, confer page 73

Application

These robust and flexible cables are used for electrical tools such as drills, hand-held circular saws, and garden equipment as well as for portable motors and machinery in agriculture, at building sites, for hobbies, docks and refrigeration plants.

Extremely good mechanical characteristics e. g. compressive load, good abrasion and near-resistant.

EMC = Electromagnetic compatibility

To optimize the EMC features we recommend a large round contact of the copper braiding on both ends.

CE = The product is conformed with the EC Low-Voltage Directive 2006/95/EC.

Part no.	No. cores x cross-sec. mm ²	Outer Ø approx. mm	Cop. weight kg / km	Weight approx. kg / km	AWG-No.
1915x	2 x 0,5	6,4	35,0	46,0	20
1916x	3 G 0,5	6,8	42,0	56,0	20
1917x	4 G 0,5	7,3	47,0	62,0	20
1918x	5 G 0,5	7,9	56,0	75,0	20
1919x	7 G 0,5	9,4	69,0	98,0	20
1920x	12 G 0,5	11,3	108,0	158,0	20
1921x	18 G 0,5	13,7	145,0	216,0	20
1922x	25 G 0,5	16,3	240,0	315,0	20
1923x	34 G 0,5	18,6	312,0	371,0	20
1924x	41 G 0,5	20,4	348,0	442,0	20

Part no.	No. cores x cross-sec. mm ²	Outer Ø approx. mm	Cop. weight kg / km	Weight approx. kg / km	AWG-No.
1925x	2 x 0,75	6,8	40,0	60,0	19
1926x	3 G 0,75	7,1	52,0	68,0	19
1927x	4 G 0,75	7,7	60,0	78,0	19
1928x	5 G 0,75	8,6	71,0	95,0	19
1929x	6 G 0,75	9,3	80,0	112,0	19
1930x	7 G 0,75	10,3	91,0	138,0	19
1931x	12 G 0,75	12,5	142,0	207,0	19
1932x	18 G 0,75	14,8	212,0	293,0	19
1933x	25 G 0,75	17,9	281,0	413,0	19
1934x	34 G 0,75	20,3	345,0	523,0	19
1935x	41 G 0,75	22,1	400,0	609,0	19

Continuation ▶

UNIPUR®-CP flexible at low temperature, with customer markings, halogen-free, wear resistant, robust, screened, EMC-preferred type, meter marking

EAC

A

Part no.	No. cores x cross-sec. mm ²	Outer Ø approx. mm	Cop. weight kg / km	Weight approx. kg / km	AWG-No.
1936x	2 x 1	7,2	50,0	65,0	18
1937x	3 G 1	7,6	60,0	76,0	18
1938x	4 G 1	8,4	71,0	89,0	18
1939x	5 G 1	9,2	88,0	108,0	18
1940x	6 G 1	10,1	97,0	141,0	18
1941x	7 G 1	11,2	111,0	187,0	18
1942x	12 G 1	13,5	184,0	240,0	18
1943x	18 G 1	16,1	260,0	335,0	18
1944x	25 G 1	19,4	349,0	484,0	18
1945x	34 G 1	22,2	486,0	627,0	18
1946x	41 G 1	24,0	531,0	738,0	18
1947x	2 x 1,5	8,6	63,0	97,0	16
1948x	3 G 1,5	9,1	80,0	119,0	16
1949x	4 G 1,5	10,1	97,0	152,0	16
1950x	5 G 1,5	11,2	119,0	168,0	16
1951x	6 G 1,5	12,1	121,0	218,0	16
1952x	7 G 1,5	13,6	147,0	243,0	16
1953x	12 G 1,5	16,3	267,0	317,0	16
1954x	18 G 1,5	19,6	374,0	481,0	16
1955x	25 G 1,5	23,8	526,0	674,0	16
1956x	34 G 1,5	27,0	629,0	881,0	16
1957x	41 G 1,5	29,3	801,0	1027,0	16

Part no.	No. cores x cross-sec. mm ²	Outer Ø approx. mm	Cop. weight kg / km	Weight approx. kg / km	AWG-No.
1958x	2 x 2,5	10,2	96,0	129,0	14
1959x	3 G 2,5	10,9	144,0	158,0	14
1960x	4 G 2,5	11,9	148,0	196,0	14
1961x	5 G 2,5	13,2	181,0	241,0	14
1962x	7 G 2,5	16,3	255,0	317,0	14
1963x	12 G 2,5	20,0	441,0	496,0	14
1964x	2 x 4	11,8	120,0	158,0	12
1965x	3 G 4	12,7	174,0	261,0	12
1966x	4 G 4	14,2	230,0	316,0	12
1967x	5 G 4	15,7	273,0	384,0	12
1968x	7 G 4	19,3	316,0	592,0	12
1969x	2 x 6	13,6	173,0	259,0	10
1970x	3 G 6	14,6	240,0	394,0	10
1971x	4 G 6	16,1	305,0	483,0	10
1972x	5 G 6	18,0	439,0	592,0	10
1973x	7 G 6	21,8	505,0	714,0	10
1974x	3 G 10	18,0	350,0	576,0	8
1975x	4 G 10	19,9	535,0	729,0	8
1976x	5 G 10	22,2	592,0	914,0	8
1977x	3 G 16	20,8	585,0	960,0	6
1978x	4 G 16	23,1	740,0	1813,0	6
1979x	5 G 16	25,5	895,0	1827,0	6

Dimensions and specifications may be changed without prior notice. (RA02)



Suitable accessories can be found in Chapter X.

- Cable Gland - HELUTOP® HT-MS-EP4