
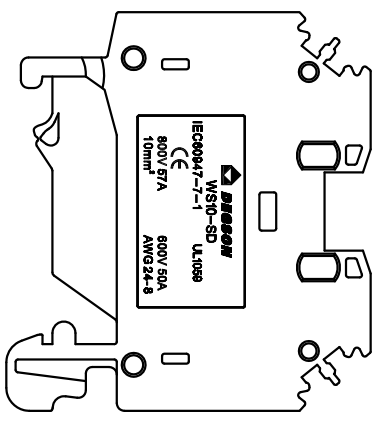

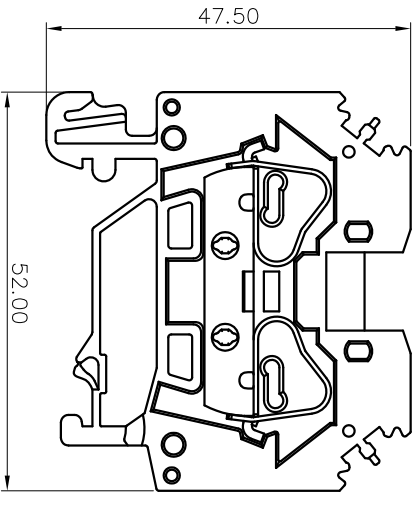


REVISION RECORD			
REV	ECN	DESCRIPTION	DRFT DATE

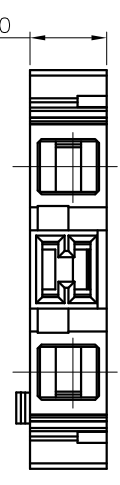

NOTES1:
 UL Standard
 1. Rated voltage/current : 600V / 50A
 2. Withstanding voltage : AC2200V/1Min.
 3. Wire range : 24~8AWG

IEC Standard

1. Pollution Degree	3
Overvoltage Category	III
Rate Impulse Voltage(kV)	8.0kV
Rate Voltage(V)	800V
Rate Current(A)	57A

2. Wire range : 0.2~10mm²

NOTES2:

1. Dimension shall be interpreted per ASME Y14.5-2009
2. Pitch : 10.0mm, Poles : N=01P
3. Stripping length : 13~14mm
4. Operating temperature: -40°C~+105°C
5. Undimensioned tolerances:

Pitch range in mm	Over	Over	Over	Over	Over	Over	Over
6 TO 10	10	10	30	60	100	150	0.1/10
10 TO 15	10	24	30	60	100	150	≤
15 TO 20	30	50	70	100	150	1.30	±2°

6. RoHS Compliance

WS10-SD - 01P - 1Y - 00A (H)
 (Series No.) (Poles) (Single Pitch) (Color) : 1.(Grey)
 2.(Blue)
 3.(Black)
 4.(Green)
 5.(Orange)
 6.(Red)
 7.(Transparent)
 8.(Yellow)
 9.(White)

PART NO. : /		NAME: DEGSON 宁波高松电子有限公司 NINGBO DEGSON ELECTRICAL CO., LTD	
APPD: /	CHKD: /	TITLE: CUSTOMER DRAWING	
DRFT: /		DRAWING NO.: /	REV: DO
THIRD ANGLE PROJECTION		DO NOT SCALE DRAWING	SHEET: 1/1
		SCALE	1:1

A 8 7 6 5 4 3 2 1