

REVISION RECORD

REV	ECN	DESCRIPTION	DRFT	DATE

NOTES1:

- UL Standard
- 1. Rated voltage/current : 600V / 20A
- 2. Withstanding voltage : AC2200V/1Min.
- 3. Wire range : 28~12AWG

IEC Standard

1. Pollution Degree	3
Overvoltage Category	III
Rate Impulse Voltage(kV)	8.0kV
Rate Voltage(V)	800V
Rate Current(A)	32A





2. Wire range : 0.2~4mm<sup>2</sup>

NOTES2:

- 1. Dimension shall be interpreted per ASME Y14.5-2009
- 2. Pitch : 6.0mm, Poles : N=01P
- 3. Stripping length : 8~9mm
- 4. Operating temperature: -40℃~+105℃
- 5. Undimensioned tolerances:

Pitch range in mm	Nominal dimension range in mm	Over	Over	Over	Over
6 TO 10	6 TO 10	30	60	100	150
10 TO 24	10 TO 30	60	100	150	
±0.15	±0.30	±0.30	±0.50	±0.70	±1.00
					±2°

6. RoHS Compliance

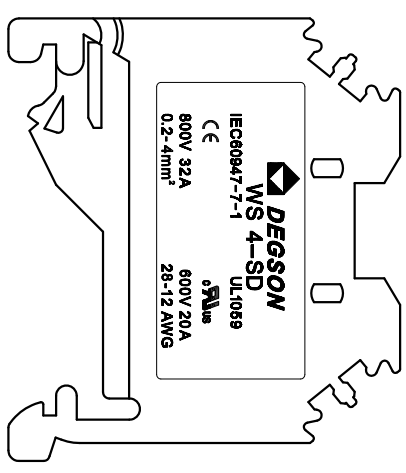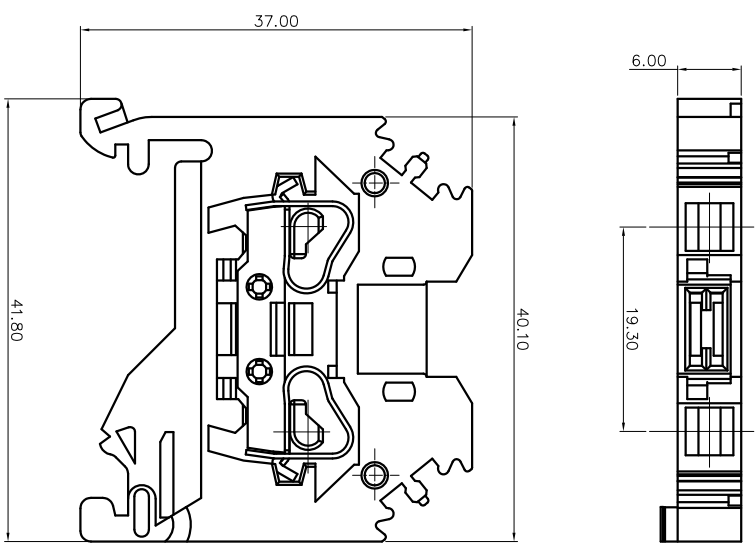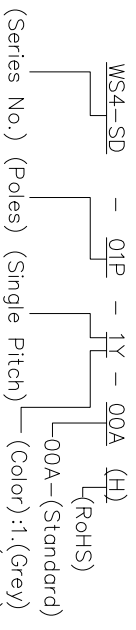

DEGSON NINGBO DEGSON ELECTRICAL CO., LTD 宁波高松电子有限公司

PART NO.:	/	NAME:	WS4-SD-01P-1Y-00A(H)
APPD:	/		
CHKD:	/		
DRFT:	/	TITLE:	CUSTOMER DRAWING
		DRAWING NO.:	/

DETACHED LISTS		REV	SCALE
	THIRD ANGLE PROJECTION	DO	1:1
	DO NOT SCALE DRAWING	SHEET	1/1