

1



GVDA 50-120A




GVDA 200-500A

GVDA series single phase AC switching module with phase-shift voltage regulating controller

1. Introduction

This product is a multi-functional power module, which integrates thyristor power circuit, SCM-control phase-shift trigger circuit, signals detects and transfer circuit, voltage modulation circuit. It can realize the precise control of the voltage of the load. With built-in linear control circuit, it is highly precise and stabilized. Rated current: 50-500A, rated voltage: 220V, 380V, 440V, 50Hz or 60Hz. It is widely used in all kinds of induction and impedance loads, for instance: AC motor, transformer, temperature control, light change, AC voltage modulation.

2. Internal connection, classification and name

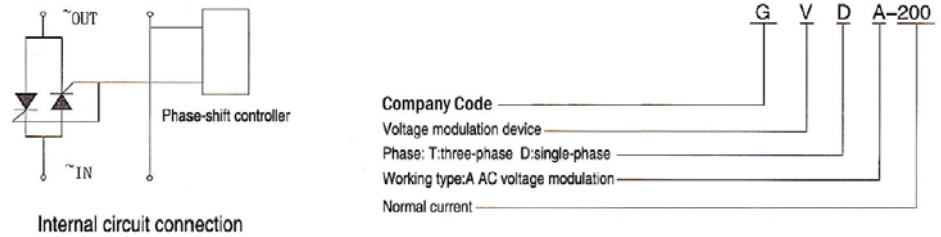

3. Main technical standards(GVDA-50;70;120;200;250;350;500)





Function	Thyristor AC single-phase voltage modulation							
Input voltage	220V±20%		380V±20%		440V±20%			
Asymmetry degree of output positive and negative waves	≤2%							
Controlling voltage	0-10VDC (input resistance 10K )							
Controlling current	4-20mA (input resistance 330 )							
Hand-control potentiometer resistance	10KΩ							
Colling method	Wind-colling radiator							
Ambient temperature	-30°C~ +40°C							
Storage temperature	-25°C~ +55°C							

Parameter	Unit	Value							
		50	70	100	120	200	250	350	500
Load current	Arms								
TRIAC over voltage	Vpk	800-1200							
Frequency	Hz	50-60							
Off state voltage rising rate	V/sec	500							
On state voltage rising rate	A/sec	100							
Off state leakape current	mArms	≤8	≤10	≤10	≤10	≤10	≤15	≤20	≤20
On state leakape current	Vrms	1.6	1.6	1.6	1.8	1.8	1.8	1.8	1.8
Voltage drop insulating voltage	Vrms	≥2500							
Weight	Kg	0.425				2.2			

4. Exterior and installation dimensions

Connections of control lines ( 50-120A module )

- 10V voltage control
- 10K potentiometer control
- 4-20mA control

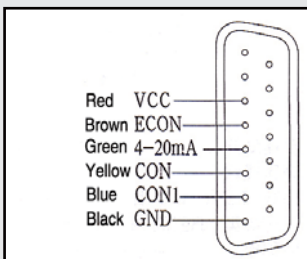

Remarks:the interfaces of 200A—500A modules:VCC(red)、CON1 (blue) 、Econ(orange)、CON(yellow)、4-20mA (green) GND (black) others are blank See the right map connections is the same as above.