




赛普 CEE/IEC 国际标准 连接器

CEE/IEC INTERNATIONAL STANDARD CONNECTOR

符合欧洲/国际标准 EN/IEC 60309-2
Conform to European / international standards EN/IEC 60309-2

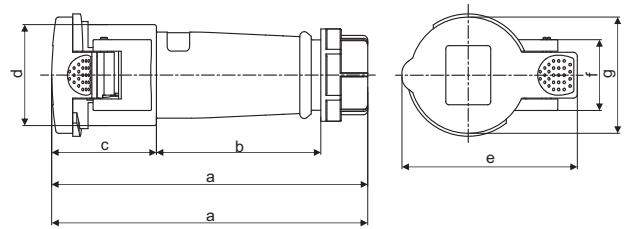

| | | | | | | | | |
|------------------------|----------|------------|----------------------|----------------------|----------------------|----------------------|-------------------------------------------------------|-----------------------------------------------------------|
| 2P+E | 3P+E | 3P+N+E | 110V 50a.60Hz | 230V 50a.60Hz | 400V 50a.60Hz | 500V 50a.60Hz | >50-500V 100-300Hz rating"/> >50-500V 100-300Hz | >50-500V a.300-500Hz rating"/> >50-500V a.300-500Hz |
| 电流 极数 Current Poles | | | 3P 4P 5P 4h 4h 4h | 3P 4P 5P 6h 9h 9h | 3P 4P 5P 9h 6h 6h | 3P 4P 5P 7h 7h 7h | 3P 4P 5P 10h 10h 10h | 3P 4P 5P 2h 2h 2h |

IP44 CEE/IEC 连接器 Connector

| 型号 MODEL | 极数 Poles | 16 | | 32 | | 32 | | 63 | | 63 | |
|-------------|-------------|--------|---------------|---------------|--------------|--------|--------|--------|--------|----|---|
| | | 3 | 4 | 3 | 4 | 3 | 4 | 3 | 4 | 3 | 4 |
| | 16 | 3 | SP509 | SP510 | SP511 | | | SP2441 | SP2517 | | |
| | | 4 | SP512 | SP513 | SP514 | SP515 | SP516 | SP517 | | | |
| | | 5 | SP518 | SP519 | SP5 | SP2026 | SP2193 | SP2495 | | | |
| | 32 | 3 | SP521 | SP522 | SP523 | | SP2196 | SP2674 | | | |
| | | 4 | SP524 | SP525 | SP526 | SP527 | SP528 | SP529 | | | |
| | | 5 | SP530 | SP531 | SP6 | SP2027 | SP2245 | SP2493 | | | |
| 63 | 3 | SP1236 | SP1237 | SP1238 | | | | | | | |
| | 4 | SP1239 | SP1240 | SP1241 | SP1242 | | | | | | |
| | 5 | SP1243 | SP1244 | SP1245 | | | | | | | |

参数 Parameter

尺寸:毫米 Size:mm

| 安培 Amp | 16 | | | 安培 Amp | 16 | | | 安培 Amp | 32 | | | 安培 Amp | 32 | | | 安培 Amp | 63 | | | 安培 Amp | 63 | | |
|-------------|------|-------|-------|----------------------------------------------------------------|----|---|---|-------------|-------|-------|----------------------------------------------------------------|-------------|----|---|-------|-------------|-------|----------------------------------------------------------------|---|-------------|----|---|---|
| 极数 Poles | 3 | 4 | 5 | 极数 Poles | 3 | 4 | 5 | 极数 Poles | 3 | 4 | 5 | 极数 Poles | 3 | 4 | 5 | 极数 Poles | 3 | 4 | 5 | 极数 Poles | 3 | 4 | 5 |
| a | 155 | 156.5 | 161.7 | 导线横截面积(平方毫米) 从最小至最大 | | | a | 200 | 200 | 200 | 导线横截面积(平方毫米) 从最小至最大 | | | a | 257 | 257 | 257 | 导线横截面积(平方毫米) 从最小至最大 | | | | | |
| b | 80.6 | 82.3 | 88 | Conductor crosssectional area (mm ²)Min. To Max | | | b | 106.5 | 106.5 | 108.7 | Conductor crosssectional area (mm ²)Min. To Max | | | b | 112.5 | 112.5 | 112.5 | Conductor crosssectional area (mm ²)Min. To Max | | | | | |
| c | 51.3 | 51.3 | 50.8 | 1.5-2.5 | | | c | 64.2 | 64.2 | 62.7 | 4-6 | | | c | 85 | 85 | 85 | 10-16 | | | | | |
| d | 49.5 | 55.7 | 63 | | | | d | 64.2 | 64.2 | 70.8 | | | | d | 77.4 | 77.4 | 77.4 | | | | | | |
| e | 86 | 90 | 97 | | | | e | 101.8 | 101.8 | 111 | | | | e | 34 | 34 | 34 | | | | | | |
| f | 34.7 | 37 | 37 | | | | f | 37 | 37 | 37 | | | | f | 108 | 108 | 108 | | | | | | |
| g | 57 | 61.2 | 69 | | | | g | 71.6 | 71.6 | 79.5 | | | | g | 92 | 92 | 92 | | | | | | |