




赛普 CEE/IEC 国际标准 工业插头

CEE/IEC INTERNATIONAL STANDARD INDUSTRIAL PLUG

符合欧洲/国际标准 EN/IEC 60309-2
Conform to European / international standards EN/IEC 60309-2

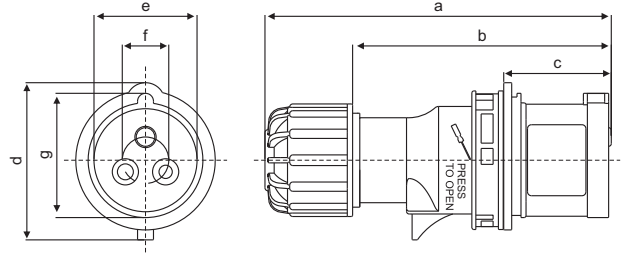

3 2P+E	4 3P+E	5 3P+N+E	110V 50a.60Hz	230V 50a.60Hz	400V 50a.60Hz	500V 50a.60Hz	>50-500V 100-300Hz	>50-500V a.300-500Hz
电流 极数 Current Poles			3P 4P 5P 4h 4h 4h	3P 4P 5P 6h 9h 9h	3P 4P 5P 9h 6h 6h	3P 4P 5P 7h 7h 7h	3P 4P 5P 10h 10h 10h	3P 4P 5P 2h 2h 2h

■ IP44 CEE/IEC 工业插头 Industrial Plug 16A-32A

型号 MODEL	16			32			32		
		3	4	5	3	4	5	3	4
	AP-247	AP-250	AP-256	AP-259	AP-262	AP-268	AP-248	AP-251	AP-257
	AP-249	AP-253	AP-214	AP-261	AP-265	AP-215	AP-252	AP-254	AP-2189
	AP-2168	AP-2189	AP-2244	AP-2195	AP-266	AP-2244	AP-267	AP-267	AP-2178

■ 参数 Parameter

尺寸:毫米 Size:mm

安培 Amp	16			安培 Amp	16			安培 Amp	32			安培 Amp	32		
极数 Poles	3	4	5	极数 Poles	3	4	5	极数 Poles	3	4	5	极数 Poles	3	4	5
a	128	132.5	139.5	导线横截面积(平方米)从最小至最大 Conductor crosssectional area (mm ²)Min. To Max			a	162	162	162	导线横截面积(平方米)从最小至最大 Conductor crosssectional area (mm ²)Min. To Max				
b	95	99.5	106.5	1.5-2.5			b	125	125	125	4-6				
c	40	40	40				c	48.5	48.5	48.5					
d	59.2	66.3	76.3				d	81	81	89.5					
e	39	44	50				e	50.5	50.5	56.5					
f	17.5	21.6	26.6				f	25	25	30					
g	47	53.5	62				g	63	63	69.5					