



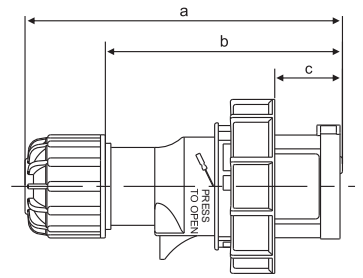

赛普 CEE/IEC 国际标准 工业插头

CEE/IEC INTERNATIONAL STANDARD INDUSTRIAL PLUG

符合欧洲/国际标准 EN/IEC 60309-2
 Conform to European / international standards EN/IEC 60309-2



3 2P+E 4 3P+E 5 3P+N+E	110V 50a.60Hz 230V 50a.60Hz 400V 50a.60Hz 400V -400 500V 50a.60Hz >50-500V 100-300Hz >50-500V a.300-500Hz	电流 极数 Current Poles	3P 4P 5P 4h 4h 4h 3P 4P 5P 6h 9h 9h 3P 4P 5P 9h 6h 6h 4P 3h 3P 4P 5P 7h 7h 7h 3P 4P 5P 10h 10h 10h 3P 4P 5P 2h 2h 2h
---------------------------------------	--	------------------------	---

■ IP67 CEE/IEC 工业插头 Industrial Plug 16A-32A

型号 MODEL	16	3			AP-277 AP-278 AP-279			AP-283	AP-284	AP-285
		4	5	AP-280	AP-281	AP-282				
	32	3	4	5	AP-286	AP-287	AP-288			
		3	4	5	AP-289	AP-290	AP-291			
		4	5	AP-292	AP-293	AP-294	AP-295	AP-2175	AP-296	AP-297
		5	AP-298	AP-299	AP-300					

■ 参数 Parameter

尺寸:毫米 Size:mm

安培 Amp	16			安培 Amp	16			安培 Amp	32			安培 Amp	32										
	极数 Poles	3	4		5	极数 Poles	3		4	5	极数 Poles		3	4	5	极数 Poles	3	4	5				
a		128	132.5	139.5		导线横截面积(平方毫米)从最小至最大 Conductor crosssectional area (mm ²)Min. To Max							a	157	157	162		导线横截面积(平方毫米)从最小至最大 Conductor crosssectional area (mm ²)Min. To Max					
b		95	99.5	106.5		1.5-2.5							b	120	120	125							
c		27	27	27									c	34.1	34.1	34.1		4-6					
d		71.5	79.5	87.5									d	93.5	93.5	101							
e		39	44	50									e	50.5	50.5	56.5							
f		17.5	21.6	26.6									f	25	25	30							
g		47	53.5	62									g	63	63	69.5							