

REVISION RECORD

REV	ECN	DESCRIPTION	DRFT	DATE
-----	-----	-------------	------	------

NOTES1:

- UL Standard
 1. Rated voltage/current : 300V / 15A
 2. Torque value : M2.5 , 2.58Lb.in
 3. Wire range : 22~14AWG

IEC Standard

1. Rated voltage/current : 450V / 20A
 2. Torque value : M2.5 , 0.29N·m
 3. Wire range : 1.0~2.5mm²






NOTES2:

1. Dimension shall be interpreted per ASME Y14.5-2009
 2. Pitch : 7.5mm, Poles : N=2~XXP
 3. Stripping length : 6~7mm
 4. Withstanding voltage : AC2500V/1Min
 5. Operating temperature : -30°C~+120°C
 6. Undimensioned tolerances:

Pitch range in mm			Nominal dimension range in mm						-	∩	∇
TO	Over	TO	TO	Over	TO	Over	TO	TO	TO	TO	
6	6	10	30	60	100	150				0.1/10	
±0.15	±0.20	±0.30	±0.30	±0.50	±0.70	±1.00	±1.30			<	

7. RoHS Compliance

DG365 - 7.5 - XXP - 1Y - 00A (H)
 (Series No.) (Pitch) (Poles) (Single Pitch) (Color): 1.(Grey)
 2.(Blue)
 3.(Black)
 4.(Green)
 5.(Orange)
 6.(Red)
 7.(Transparent)
 8.(Yellow)
 9.(White)

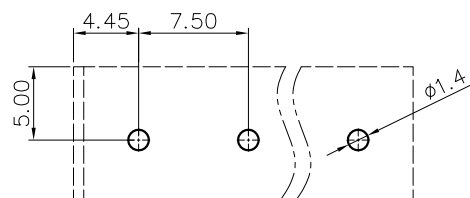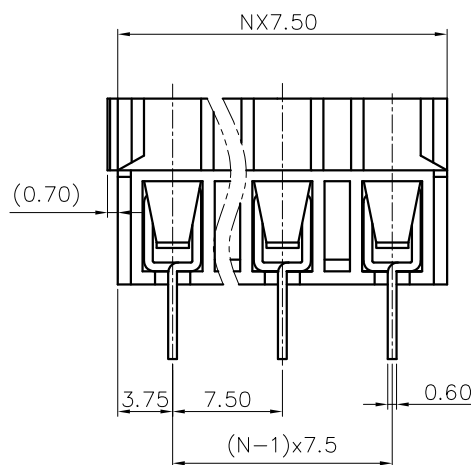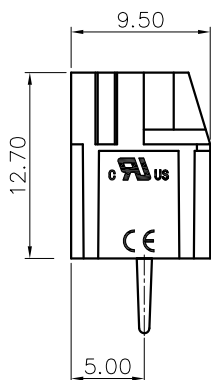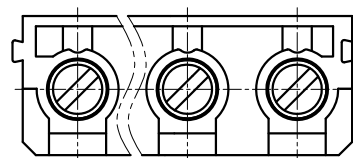

PCB LAYOUT

DETACHED LISTS	PART NO.:	NINGBO DEGSON ELECTRICAL CO., LTD			
	APPD:	NAME: DG365-7.5-XXP-1Y-00A(H)			
	CHKD:	TITLE: CUSTOMER DRAWING			
	DRFT:	DRAWING NO.:		REV	DO
THIRD ANGLE PROJECTION		MM (INCH)	DO NOT SCALE DRAWING	SHEET 1/1	SCALE 1:1