

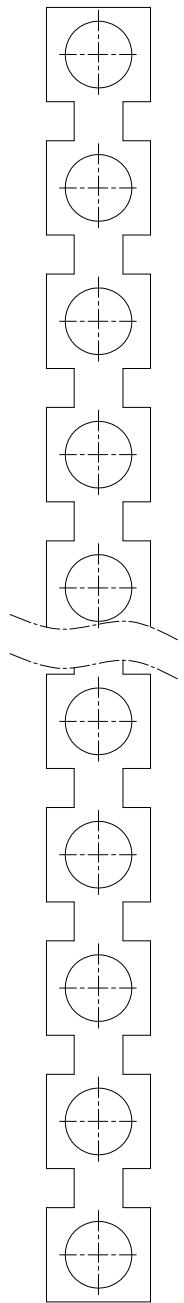
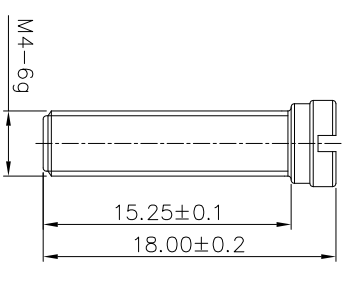



REVISION RECORD			
REV	ECN	DESCRIPTION	DRFT DATE



FBI XX - 8  
(Series No.) (Poles) (Pitch)

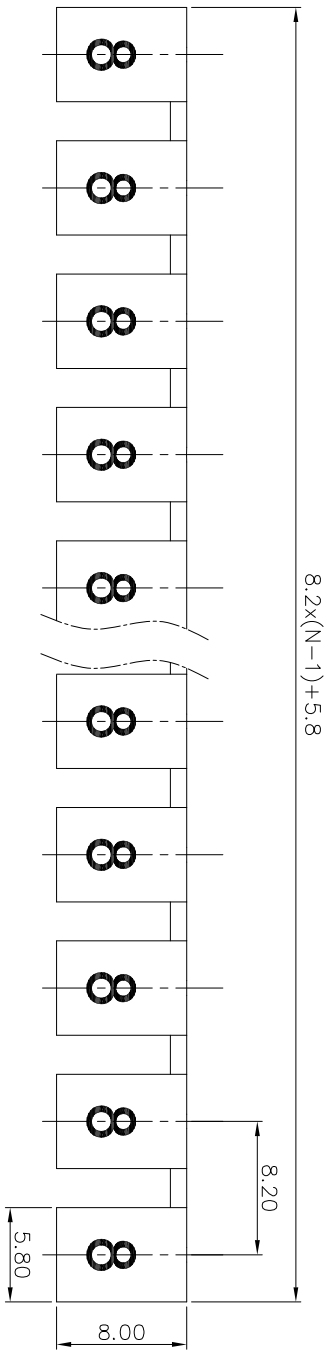

NOTES:  
UL Standard  
1. Torque value : M4 , 10.53Lb.in  
IEC Standard  
1. Torque value : M4 , 1.2N·m

NOTES2:  
1. Dimension shall be interpreted per ASME Y14.5-2009  
2. Pitch : 8.2mm, Poles : 02~10P  
3. Undimensioned tolerances:

Pitch range in mm	Over TO	in mm	Nominal dimension	Over TO	in mm	Over TO	in mm	Over TO	in mm	Over TO	in mm	Over TO	in mm	Over TO	in mm	Over TO	in mm
6	10	24	30	60	100	150	200	300	400	500	600	700	800	900	1000	1100	1200
±0.15	±0.20	±0.30	±0.30	±0.50	±0.70	±1.00	±1.30	±2.00	±2.50	±3.00	±4.00	±5.00	±6.00	±7.00	±8.00	±10.00	±12.00

4. RoHS Compliance

Current carrier and screws should be packed individually, which must be put in the same box

DETACHED LISTS		PART NO.:		NAME:		TITLE:		REV	
DRFT:	/	APPD:	/	CHKD:	/	DRFT:	/	APPD:	/
THIRD ANGLE PROJECTION		NINGBO DEGSON ELECTRICAL CO., LTD		FBIXX-8		CUSTOMER DRAWING		DO NOT SCALE DRAWING	
DRAWING NO.:	MM	NINGBO DEGSON ELECTRICAL CO., LTD		FBIXX-8		CUSTOMER DRAWING		DO NOT SCALE DRAWING	
SCALE	1:1	NINGBO DEGSON ELECTRICAL CO., LTD		FBIXX-8		CUSTOMER DRAWING		DO NOT SCALE DRAWING	

A

B

C

D

E

F

G

H

6

5

4

3

2

1

A

B

C

D

E

F

G

H